


TA-Aluform® Corrugated sheets 18/76 for roof & wall

Product Data Sheet

Material	Aluminium - EN AW 3005
Surface	Natural mill finish aluminum, natural stucco patterned aluminum
Surface finish	Lacquering (polyester, PVdF, HDP), anodizing
Backside finish	Protective lacquer, anti-drip fleece, acoustic fleece
Length	500 to 10,500 mm available ex works (special lengths on request)
Perforation	Rv 3-5, Rv 5-8 (other hole patterns on request)
Approval number	Z-14.1-545
Building material class	A1

Thickness / mm	Weight / kg/m ²	Coil width / mm
0.35 (no approval)	1.162	1255
0.5	1.660	1255
0.6	1.992	1255
0.7	2.244	1255
0.8	2.564	1255
1.0	3.205	1255
1.2	3.846	1255

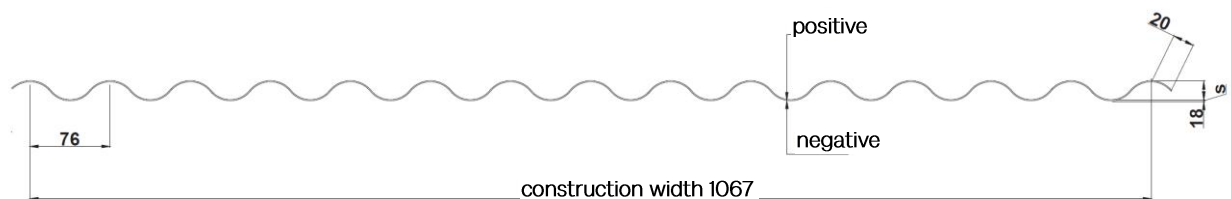

wall installation



01 | 08.2025

The Best Part

Tacke + Lindemann GmbH
Beratgerstraße 31-33 | 44149 Dortmund

Tel +49 (0)231 77 77 7-0
Fax +49 (0)231 77 77 7-50
E-Mail info@tacke-lindemann.de
Web www.tacke-lindemann.de

Disclaimer

Our products are based on careful research and reflect the current state of the art. The data and information are provided to the best of our knowledge, but without guarantee. All values given are average values, not maximum or minimum values, and do not constitute a guarantee. Changes and deviations are possible; we expressly reserve the right to make technical adjustments. It is the responsibility of the user to independently check the suitability of the product for the respective application before use. We accept no liability for errors, inaccuracies, omissions or changes. Furthermore, the applicable regulations, rules and DIN standards must be observed. The use of texts, images and drawings, even in part, is not permitted without consent. Our General Terms and Conditions (GTC) apply exclusively.