


TA-Aluform® Trapezoidal Profile 20/125 for roof & wall

Product Data Sheet

Material	Aluminium - EN AW 3005
Surface	Natural mill finish aluminum, natural stucco patterned aluminum
Surface finish	Lacquering (polyester, PVdF, HDP), anodizing
Backside finish	Protective lacquer, anti-drip fleece, acoustic fleece
Length	500 to 9,000 mm available ex works (special lengths on request)
Perforation	Rv 3-5, Rv 5-8 (other hole patterns on request)
Approval number	Z-14.1-545
Building material class	A1

Thickness / mm	Weight / kg/m ²	Coil width / mm
Construction width 1000 mm		
0.5	1.631	1195
0.7	2.283	1195
0.8	2.609	1195
1.0	3.262	1195
Construction width 1125 mm		
0.5	1.620	1330
0.7	2.258	1330
0.8	2.581	1330
1.0	3.226	1330

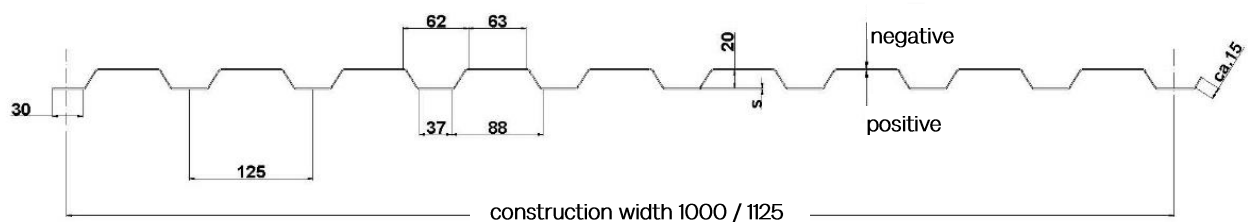

wall installation



01 | 07.2025

The Best Part

Tacke + Lindemann GmbH

Beratgerstraße 31-33 | 44149 Dortmund

Tel +49 (0)231 17 77 7-0

Fax +49 (0)231 17 77 7-50

E-Mail info@tacke-lindemann.de

Web www.tacke-lindemann.de

Disclaimer

Our products are based on careful research and reflect the current state of the art. The data and information are provided to the best of our knowledge, but without guarantee. All values given are average values, not maximum or minimum values, and do not constitute a guarantee. Changes and deviations are possible; we expressly reserve the right to make technical adjustments.

It is the responsibility of the user to independently check the suitability of the product for the respective application before use.

We accept no liability for errors, inaccuracies, omissions or changes. Furthermore, the applicable regulations, rules and DIN standards must be observed.

The use of texts, images and drawings, even in part, is not permitted without consent.

Our General Terms and Conditions (GTC) apply exclusively.