


# TA-Aluform® Trapezoidal Profile 40/167 for roof & wall

## Product Data Sheet

|                                |                                                                   |
|--------------------------------|-------------------------------------------------------------------|
| <b>Material</b>                | Aluminium - EN AW 3005                                            |
| <b>Surface</b>                 | Natural mill finish aluminium, natural stucco patterned aluminium |
| <b>Surface finish</b>          | Lacquering (polyester, PVdF, HDP), anodizing                      |
| <b>Backside finish</b>         | Protective lacquer, anti-drip fleece, acoustic fleece             |
| <b>Length</b>                  | 500 to 9,000 mm available ex works (special lengths on request)   |
| <b>Perforation</b>             | Rv 3-5, Rv 5-8 (other hole patterns on request)                   |
| <b>Approval number</b>         | Z-14.1-545                                                        |
| <b>Building material class</b> | A1                                                                |

| Thickness / mm                    | Weight / kg/m <sup>2</sup> | Coil width / mm |
|-----------------------------------|----------------------------|-----------------|
| <b>Construction width 835 mm</b>  |                            |                 |
| 0.5                               | 1.950                      | 1195            |
| <b>Construction width 1002 mm</b> |                            |                 |
| 0.5                               | 1.809                      | 1330            |
| 0.7                               | 2.532                      | 1330            |
| 0.8                               | 2.894                      | 1330            |
| 1.0                               | 3.617                      | 1330            |

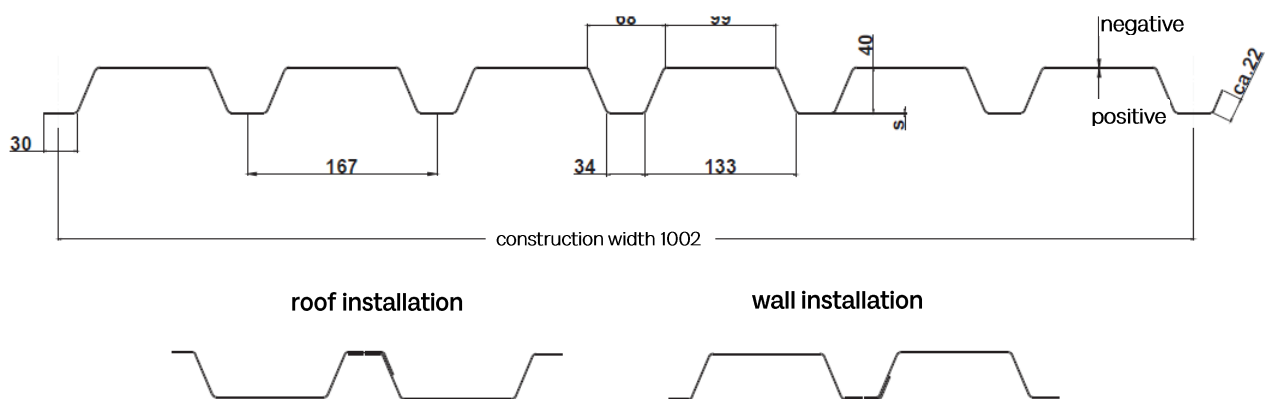

### Disclaimer

Our products are based on careful research and reflect the current state of the art. The data and information are provided to the best of our knowledge, but without guarantee. All values given are average values, not maximum or minimum values, and do not constitute a guarantee. Changes and deviations are possible; we expressly reserve the right to make technical adjustments. It is the responsibility of the user to independently check the suitability of the product for the respective application before use. We accept no liability for errors, inaccuracies, omissions or changes. Furthermore, the applicable regulations, rules and DIN standards must be observed. The use of texts, images and drawings, even in part, is not permitted without consent. Our General Terms and Conditions (GTC) apply exclusively.