TA-Aluform® Trapezoidal Profile 20/125 for roof & wall

Product Data Sheet

Material	Steel S 320 GD
Surface	Galvanized steel Z 275, Aluzinc AZ 185
Surface finish	Lacquering (polyester, PVdF, HDP)
Backside finish	Protective lacquer, anti-drip fleece, acoustic fleece
Length	500 to 13,000 mm available ex works (special lengths on request)
Perforation	Rv 3-5, Rv 5-8 (other hole patterns on request)
Approval number	T25-012
Building material class	A1

Thickness / mm	Weight / kg/m²	Coil width / mm
Construction width 1000 mm		
0.63	6.023	1195
0.75	7.17	1195
1.0	9.56	1195
Construction width 1125 mm		
0.63	6.703	1330
0.75	7.98	1330
1.0	10.64	1330

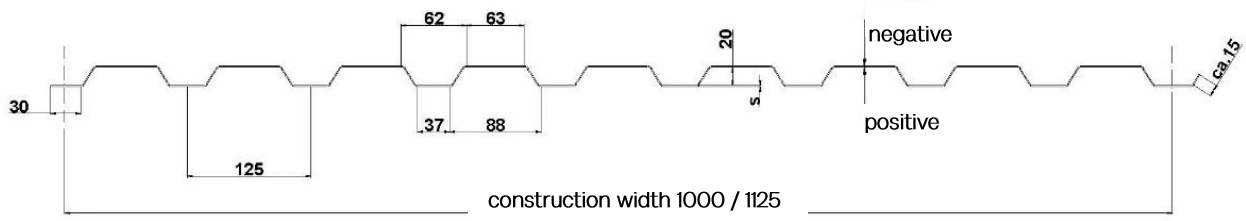

wall installation

Tacke + Lindemann GmbH
Beratgerstraße 31-33 | 44149 Dortmund

Tel +49 (0)231 17 77 7-0
Fax +49 (0)231 17 77 7-50
E-Mail info@tacke-lindemann.de
Web www.tacke-lindemann.de

Disclaimer
Our products are based on careful research and reflect the current state of the art. The data and information are provided to the best of our knowledge, but without guarantee. All values given are average values, not maximum or minimum values, and do not constitute a guarantee. Changes and deviations are possible; we expressly reserve the right to make technical adjustments.
It is the responsibility of the user to independently check the suitability of the product for the respective application before use.
We accept no liability for errors, inaccuracies, omissions or changes. Furthermore, the applicable regulations, rules and DIN standards must be observed.
The use of texts, images and drawings, even in part, is not permitted without consent.
Our General Terms and Conditions (GTC) apply exclusively.