


TA-Aluform® Trapezoidal Profile 40/167 for roof & wall

Product Data Sheet

Material	Aluminium - EN AW 3005	
Surface	Natural mill finish aluminium, natural stucco patterned aluminium	
Surface finish	Lacquering (polyester, PVdF, HDP), anodizing	
Backside finish	Protective lacquer, anti-drip fleece, acoustic fleece	
Length	500 to 13,000 mm available ex works (special lengths on request)	
Perforation	Rv 3-5, Rv 5-8 (other hole patterns on request)	
Approval number	Z-14.1-545	
Building material class	A1	

Thickness / mm	Weight / kg/m²	Coil width / mm	
Construction width 835 mm			
0.5	1.950	1195	
Construction width 1002 mm			
0.5	1.809	1330	
0.7	2.532	1330	
0.8	2.894	1330	
1.0	3.617	1330	

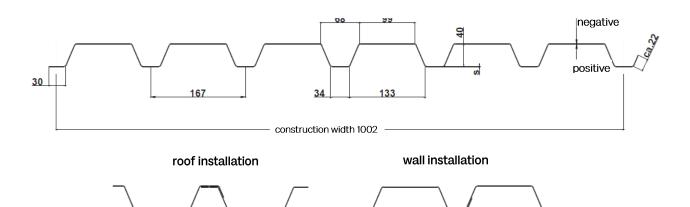

The Best Part 03 | 10.2025

Tacke + Lindemann GmbH

Beratgerstraße 31-33 | 44149 Dortmund

Tel +49 (0)23117777-0 Fax +49 (0)23117777-50 E-Mail info@tacke-lindemann.de www.tacke-lindemann.de

Disclaimer

Our products are based on careful research and reflect the current state of the art. The data and information are provided to the best of our knowledge, but without guarantee. All values given are average values, not maximum or minimum values, and do not constitute a guarantee. Changes and deviations are possible; we expressly reserve the right to make technical adjustments.
It is the responsibility of the user to independently check the suitability of the product for the

respective application before use.

We accept no liability for errors, inaccuracies, omissions or changes. Furthermore, the applicable regulations, rules and DIN standards must be observed.

The use of texts, images and drawings, even in part, is not permitted without consent. Our General Terms and Conditions (GTC) apply exclusively.